
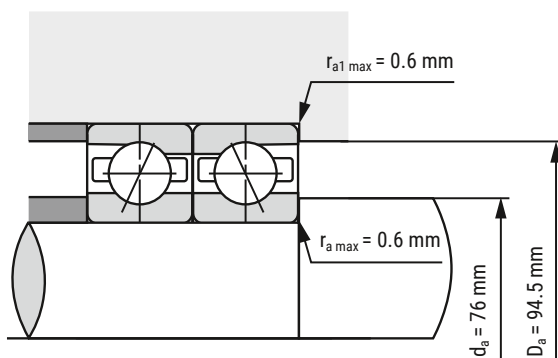


Spindle Bearing B71914-E-T-P4S-UL

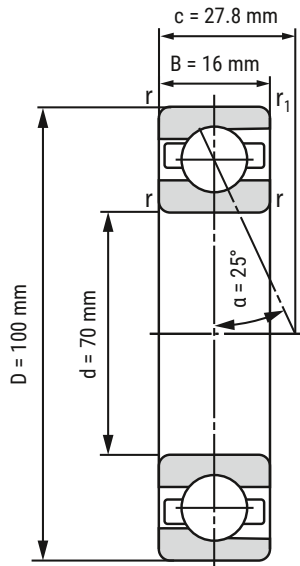

d	70 mm
D	100 mm
B	16 mm

c	27.8 mm	
D _a	94.5 mm	Tolerance: H12
d _a	76 mm	Tolerance: h12
r _{min}	1 mm	
r _{1 min}	0.6 mm	
r _{a max}	0.6 mm	
r _{a1 max}	0.6 mm	
α	25°	Contact angle

m	0.34 kg	Mass
Cr	30660 N	Basic dynamic load rating, radial
C0r	29580 N	Basic static load rating, radial
FVL	290 N	Preload force
FVM	690 N	Preload force
FVH	1370 N	Preload force
CaL	165.9 N/μm	Axial rigidity
CaM	228.3 N/μm	Axial rigidity
CaH	297.8 N/μm	Axial rigidity
nG Grease	11000 r/min	Limiting speed grease lubrication
nG Oil	18000 r/min	Limiting speed oil lubrication

i All indications were made carefully and verified. Kugellager-Express doesn't assume any liability for incomplete or false indications.

HERE YOU'LL FIND THE
ITEM WEBPAGE
(click or scan)

